

toptech^{plus}45-W33D


COLGED
useful innovation

Code commercial

Code production

4533WD

919495

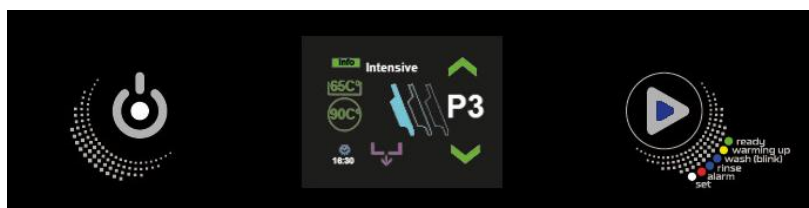

	Overall dimension (WxDxH)	mm	600x610x820
	Packaging dimension (WxDxH)	mm	670x690x980
	Gross weight	Kg	75
	Net weight	Kg	67
	Volume	mc	0,45
	Rack size	mm	500x500
	Max door\hood opening	mm	300
	Max glasses\plate height	mm	270
	Flank's construction		double wall
	Tank construction		deep drawn
	Tank volume		15
	Tank heating element	W	2000
	Tank surface strainers		inox
	Wash arms		parallel clip-in
	Wash pump type		double flow
	Wash pump power	W	200
	Wash temperature	°C	55
	Boiler type		open
	Boiler volume		6
	Back-flow system		break tank
	Boiler heating element		5000
	Rinse booster pump		yes
	Rinse booster pump power	W	200
	Rinse temperature	°C	65
	Rinse arms		parallel clip-in
	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Rinse water consumption	liter/rack	1,5
	Optimal external water pressure	bar	0,5-6,0
	Wash cycle (P)	sec	75
	Fast program (DIN)		100
	Total programs	programs	n°7
	Electric connection	V-PH-HZ	400V 3N 50Hz
	Total power	W	7.500
	Alternative power	W	5.500
	Alternative power (230V 3 50Hz)	W	5.500
	Alternative power (230V 1N 50Hz)	W	3.500
	Fuse	A	16
	Water softener		no



Equipments

Flat rack	n°2	780148
Cutterly rack	n°1	780139
Electric cable	n°1	yes
Drain hose	n°1	yes
Fill hose	n°1	yes

TECHNICAL FILE 2025

toptech^{plus}45-W33D

