

toptech^{plus} 49-33D

Code commercial	Code production
4923D	N6233CD0ACD






	Overall dimension (WXDXH)	mm	703x750x1590
	Packaging dimension (WXDXH)	mm	830x870x1600
	Gross weight	Kg	130
	Net weight	Kg	120
	Volume	mc	1,100
	Rack size	mm	500x600
	Max door\hood opening	mm	470
	Max glasses\plate height	mm	450
	General construction		single wall
	Door\hood construction		double wall
	Tank construction		deep drawn
	Tank volume		30
	Tank heating element	W	3000
	Tank surface strainers		inox
	Wash arms		parallel clip-in
	Wash pump type		double flow
	Wash pump power	W	1000
	Wash temperature	°C	55-75
	Boiler type		open
	Boiler volume		7
	Back-flow system		break tank
	Boiler heating element		6000
	Rinse booster pump		yes
	Rinse booster pump power	W	200
	Rinse temperature	°C	45-85
	Rinse arms		parallele clip-in
	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Rinse water consumption	liter/rack	1,8
	Optimal external water pressure	bar	0,5-6,0
	Wash cycle (P)	sec	60
	Fast program (DIN)		100
	Total programs	programs	n°23
	Total power	W	10.000
	Electric connection	V-PH-HZ	400V 3N 50Hz
	Fuse	A	16
	Water softener		no



Equipments		
Plate rack	n°1	70180
Flat rack	n°1	70181
Cutterly rack	n°1	780081
Electric cable	n°1	yes
Drain hose	n°1	yes
Fill hose	n°1	yes

toptechplus 49-33D

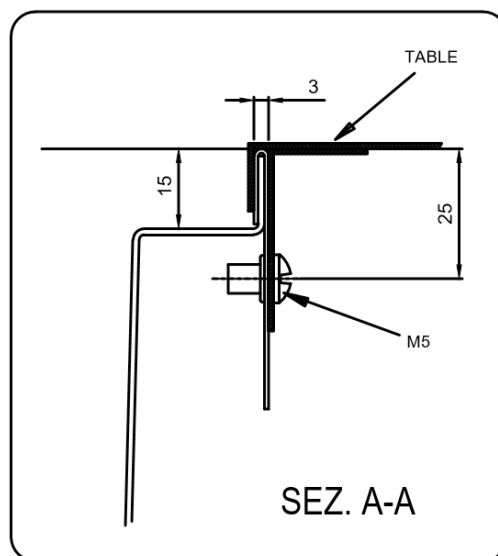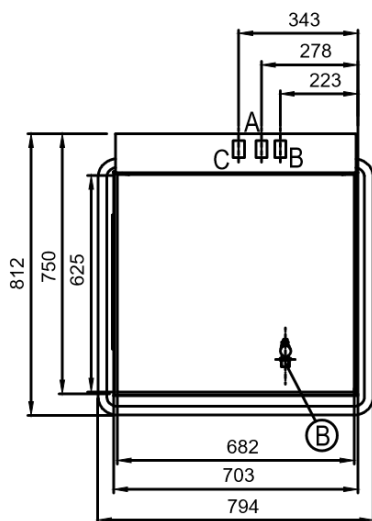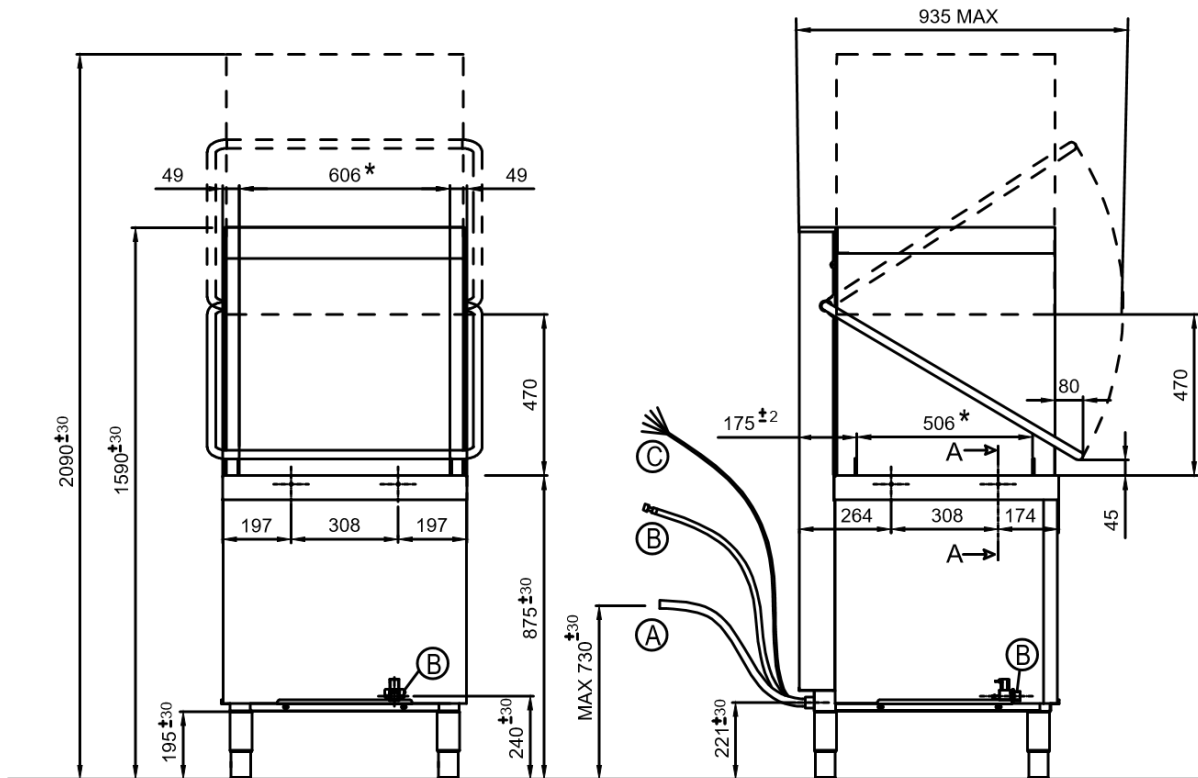

A		Ø 32 mm
B		G 3/4"
C		Power supply

* LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE OUTILE POUR PANIER
NUTZBARE OFFNUNG FÜR KORBE
ABERTURA UTIL PARA CESTO